

LEDDIM SMART

DIGITAL TRAILING EDGE DIMMER



220-240V, 50/60Hz, 3-400VA, 0-35°C

EN: Push button (optional)
FR: Bouton-poussoir (optionnel)
DE: Druckknopf (optional)

⌚ 0-1s

⌚ >1s

EN: Minimum dimming level adjustment
FR: Réglage du niveau de gradation minimal
DE: Anpassung der minimalen Dimmstufe

A

E.g. ELKO

E.g. ABB

B

E.g. Schneider

Reset / Réinitialiser / Zurücksetzen ↻

⌀ 0.5 - 4.0 mm²

CORPORATE OFFICE:
SG Armaturen AS
Svåbekk 15
4790 Lillesand
NORGE
Tlf: +47 37 50 03 00
firmapost@sg-as.no
www.sg-as.no

BRANCH OFFICE:
SG Lighting SA/NV
Blokhuysstraat 47
2800 Mechelen Noord I
BELGIQUE/BELGIË
Tlf: +32(0) 15 20 72 71
info.benelux@silighting.net
www.silighting.net

BRANCH OFFICE:
SG Armaturen A/S
Egebakken 19
7400 Herning
DANMARK
Tlf: +45 70 70 72 13
info@sg-as.dk
www.sg-as.dk


BRANCH OFFICE:
SG Lighting SA/NV
73 rue de Saint Mandrier
83140 Six Fours Les Plages
FRANCE
Tlf: +33(0) 4 94 93 00 00
info.france@silighting.fr
www.silighting.net

BRANCH OFFICE:
SG Leuchten GmbH
Postfach 67 04 21
22344 Hamburg
GERMANY
Tlf: +49 40 23 99 44 59
info@sg-leuchten.de
www.sg-leuchten.de





BRANCH OFFICE:
SG Armaturen AB
August Barksg. 30B
421 32 Västra Frölunda
SVERIGE
Tlf: +46 31 81 71 10
info@sg-ab.se
www.sg-ab.se

Rev: 21.06.2017

** Max. load / Charge maximale / Maximale Belastung

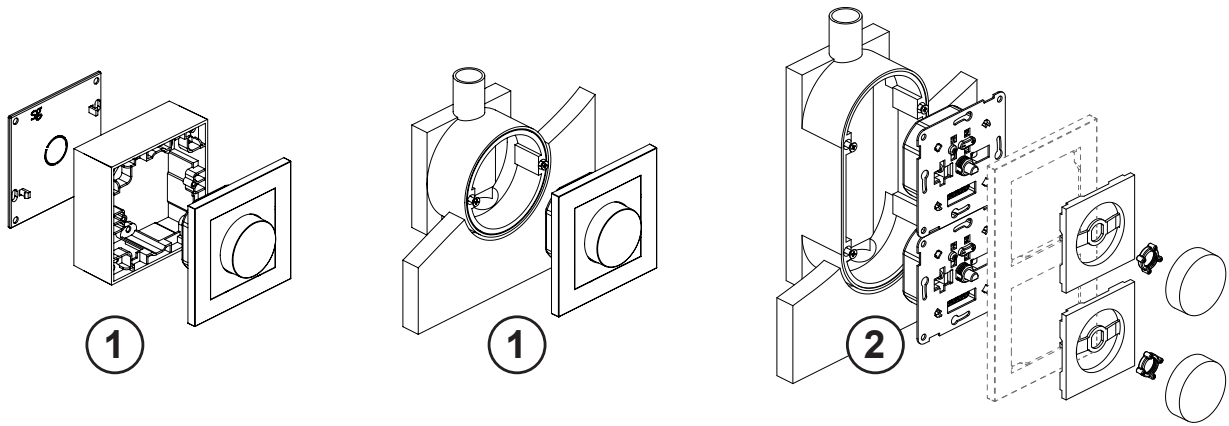

Load type / Type de charge électrique / Art der elektrischen Belastung	R	C	R+C	L
1 Single dimmer / Un variateur unique / Einziger Dimmer	Max. 400W	Max. 320W	Max. 320W	✗
2 Two or more dimmers / Deux ou plusieurs variateurs / Zwei oder mehr Dimmer	Max. 300W/pc.	Max. 240W/pc.	Max. 240W/pc.	✗

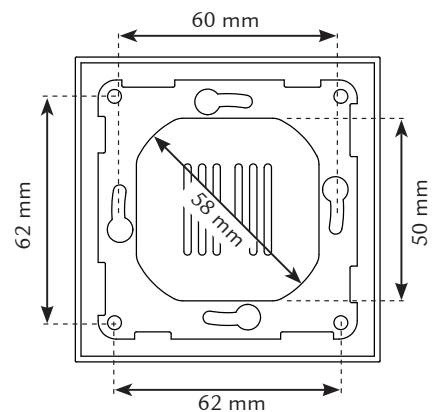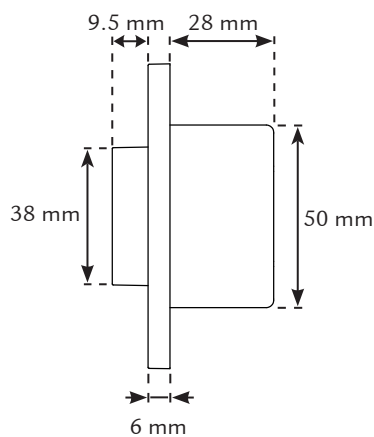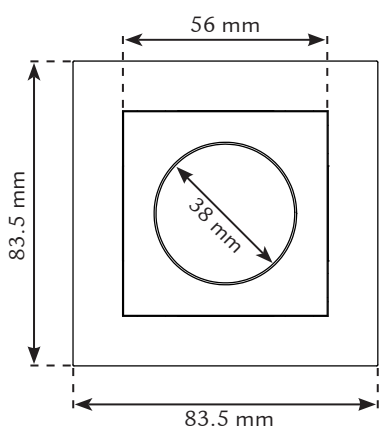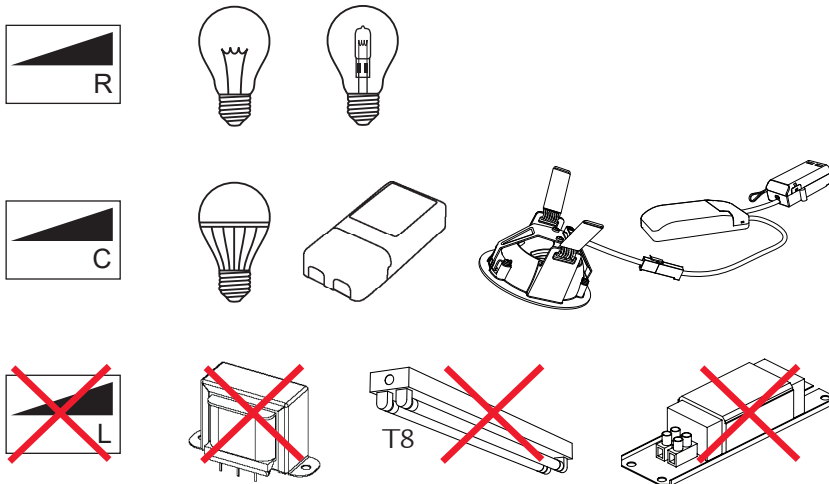

LEDDIM APP






ANDROID
Android OS 5.1
Ram 2.5GB
mid-range CPUs<



IOS
IOS 9.0
iPhone 5s<

LEDDIM Guide

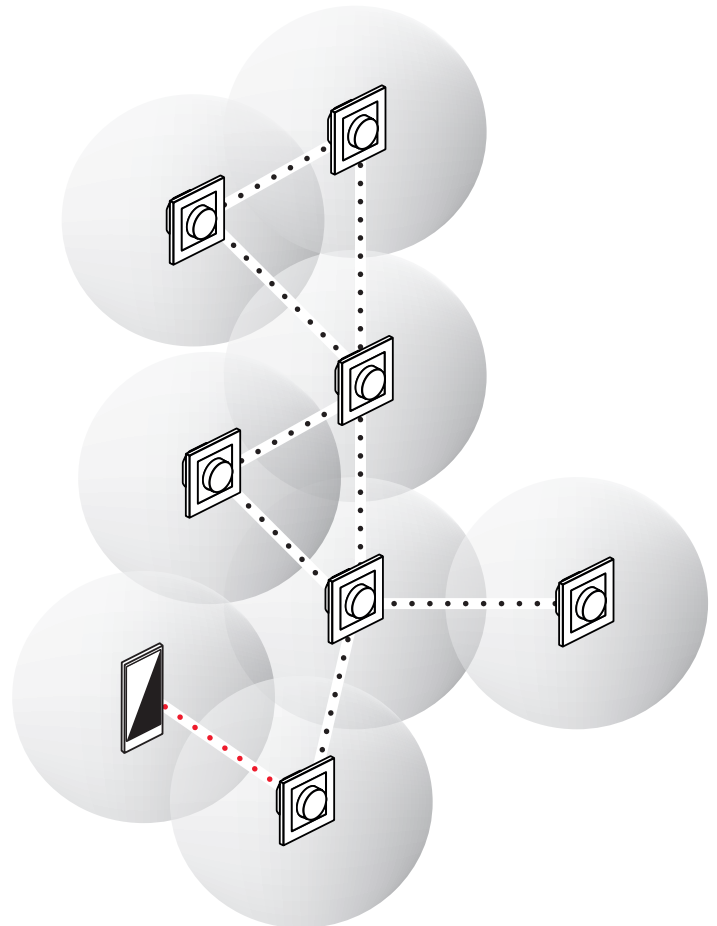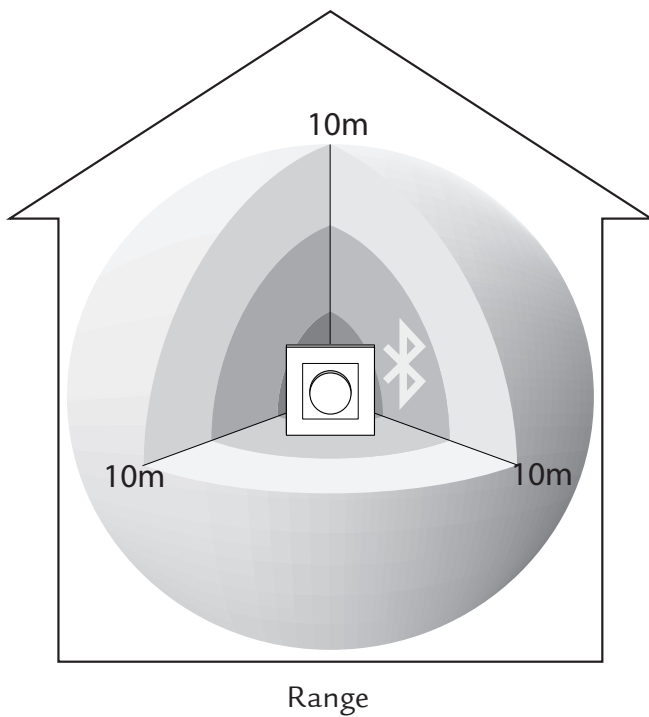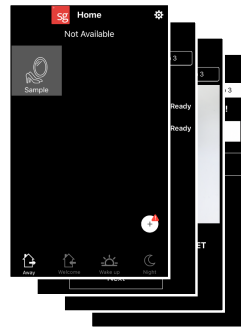

Mesh grid function

LEDDIM APP

En: dimmer setup/ Fr: Réglage du gradateur/ De: Dimmer-Setup

