



GYRO ISOSAFE DIMTOWARM SORT 2X6W LED 2000-2800K 230V 32 025 34 / 901263




ILLUSTRASJONER:

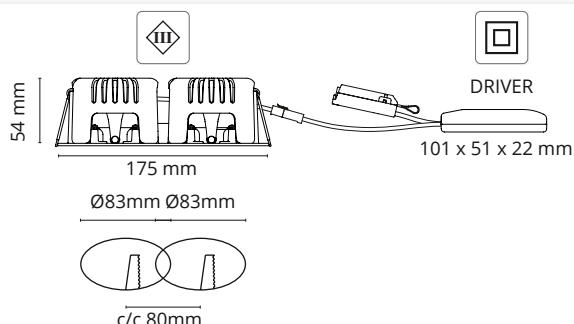

AVSTAND:

Minimums avstand til brennbart materiale i armaturens stråleretning.



TEKNISKE DATA

Kontrollenhet:	230V 50/60Hz (SELV)
Lyskilde:	2x6W/180mA
Systemeffekt:	15W
Lumen output (lm):	1020 lm
Effektiv lysstrøm:	68 lm/W
Fargetemperatur:	2000-2800K
Ra indeks:	Ra>95
MacAdam/SDCM:	3-step
Lysspredning:	42°
Levetid (timer):	50 000 (L90/B10)
Dimbar Faseavsnitt:	✓
Dimbar 1-10V:	X
Dimbar DALI:	X
Forkobling:	Inkludert
Isolasjonsklasse:	KL III
IP-grad:	IP44

MÅL: (mm)

Hulldiameter:	2x Ø83 c/c80
Lengde/bredde:	175/95
Høyde:	54

MATERIALE

Base:	Aluminium, Steel
Avskjerming:	Glass

FORPAKNING

	Antall
Eske:	1
Grossist forpakning:	20

BYTTE AV LYSKILDE:

Denne armaturen har integrert lyskilde som ikke kan byttes.

LUX

Høyde (meter)	Max Lux
1.00 m	1474
2.00 m	369
3.00 m	164

