

DALI MCU | Light management systems



Areas of application

- Conference rooms
- Restaurants
- Shop lighting

Product benefits

- Intuitive manual dimming and switching
- Individual setting of minimal brightness level

Product features


- Up to 4 DALI MCUs can be connected in parallel to set up multiple control points
- Automatic synchronization between the control points
- Cover and rotary switch in neutral white
- Length of the DALI control cable: up to 300 m

Technical data

Electrical data

Nominal voltage	230 V
Mains frequency	50...60 Hz
System wattage	2.00 W

Dimensions & weight

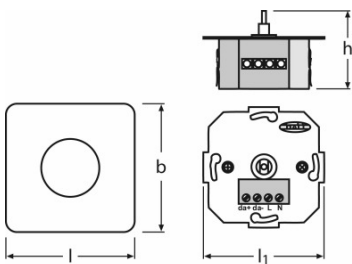

Length	80.0 mm
Width	80.0 mm
Height	50.0 mm
Product weight	98.00 g
Mounting hole spacing, length	70.0 mm

Colors & materials

Product color	White
---------------	-------

Temperatures & operating conditions

Ambient temperature range	0...+50 °C
---------------------------	------------

Capabilities

Dimming interface	DALI
Number of control outputs	1
Type of installation	Integrated in flush device box


Certificates & standards

Type of protection	IP20
Protection class	II

Product datasheet

Equipment / Accessories

- Suitable for up to 25 electronic control gears
- Flexible expansion via DALI repeaters or further DALI MCUs
- Cover and rotary knob included



Others graphics

Download Data

File	
	Brochures Scenes
	Declarations of conformity Declaration of Conformity_MCU
	Installation/Operation notice DALI MCU online training
	Installation/Operation notice DALI MCU application note
	Installation/Operation notice DALI MCU digital rotary dimmer
	Installation guide DALI MCU digital rotary dimmer

Logistical Data

Product code	Product description	Packaging unit (Pieces/Unit)	Dimensions (length x width x height)	Volume	Gross weight
4008321189721		Shipping carton box 15	430 mm x 149 mm x 210 mm	13.45 dm ³	2190.00 g

The mentioned product code describes the smallest quantity unit which can be ordered. One shipping unit can contain one or more single products. When placing an order, for the quantity please enter single or multiples of a shipping unit.

Disclaimer

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.